


2300 & 2500 CYCLORAMA TRACK

No. 2300 and No. 2500 cyclorama tracks are designed for walk along operation and are supplied in straight, curved, and serpentine sections. No. 2500 is available in single, double and triple-track configurations, while the No. 2300 can be fabricated in single or double-track assemblies. A variety of track switching mechanisms are available for both track systems. Open rail construction makes for simple maintenance and carrier replacement.

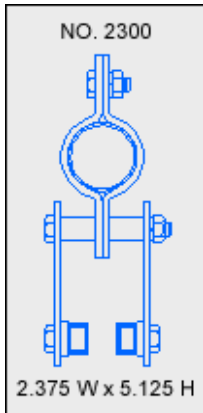

No. 2300 Medium Duty Cyclorama Track is constructed using a 1-1/4 O.D. x .049" steel tube strong-back from which 14 gauge "C" channel carrier rails are supported. Track assemblies are supplied in straight or curved sections. Carrier rails are concentrically roll formed to match strong-back. Heavy wall tube may be substituted on strong-back for applications requiring extra wide supports or heavy loads. Master carriers are supplied with a nylon coated wire rope pull line for walk-along operation CWANA* prices for straight and curved track sections are based on purchase of 20 ft. track lengths. Minimum curve radius is 18 inches. Shorter lengths are priced on request

*CWANA = Comes With All Necessary Accessories


CWANA Drapery track assemblies include the following components:

- 1 sect. 2300 Track Assembly
- 1 lot 1015D Track Tube Clamps (4 foot on center)
- 1 ea. 1206 Leader (master carrier) with drag line cable & pull ring per track
- 1 pr. 1207 Track End Stops per track
- 1 lot 1210 Intermediate Carriers (12" on center)

CWANA 2300 Drapery Track assemblies (20 ft. lengths):

- 2300 Single Cyclorama Track - Straight CWANA
- 2300C Single Cyclorama Track - One Curve CWANA
- 2300-2 Double Cyclorama Track - Straight CWANA
- 2300-2C Double Cyclorama Track - One Curve CWANA

Refer to the No. 2300 Price List for additional detail and pricing.

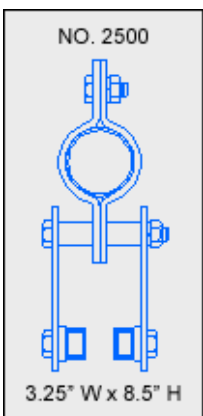

No. 2500 Heavy Duty Cyclorama Track is constructed using a 2" O.D. x .049" steel tube strong-back from which 14 gauge "C" channel carrier rails are supported. Track assemblies are supplied in straight or curved sections. Carrier rails are concentrically roll formed to match strong-back. Heavy wall tube may be substituted on strong-back for applications requiring extra wide supports or heavy loads. Master carriers are supplied with a nylon coated wire rope pull line for walk-along operation CWANA* prices for straight and curved track sections are based on purchase of 20 ft. track lengths. Minimum curve radius is 24 inches. Shorter lengths are priced on request. Standard center to center spacing for double and triple track is 8 inches.

*CWANA = Comes With All Necessary Accessories

CWANA Drapery track assemblies include the following components:

- 1 sect. 2500 Track Assembly
- 1 lot 1015C Track Tube Clamps (5 foot on center)
- 1 ea. 1006 Leader (master carrier) with drag line cable & pull ring per track
- 1 pr. 2008 Track End Stops per track
- 1 lot 8010 Intermediate Carriers (12" on center)

CWANA 2500 Drapery Track assemblies (20 ft. lengths):

- 2500 Single Cyclorama Track - Straight CWANA
- 2500C Single Cyclorama Track - One Curve CWANA
- 2500-2 Double Cyclorama Track - Straight CWANA
- 2500-2C Double Cyclorama Track - One Curve CWANA
- 2500-3 Triple Cyclorama Track - Straight CWANA
- 2500-3C Triple Cyclorama Track - One Curve CWANA

Refer to the No. 2500 Price List for additional detail and pricing.